



SPLIT

GENERATORE D'ACQUA CALDA PROFESSIONALE
PROFESSIONAL HOT WATER GENERATOR

SPLIT - GENERATORE D'ACQUA CALDA PROFESSIONALE
PROFESSIONAL HOT WATER HEATER

- Generatore d'acqua calda per installazione fissa a muro o su supporto
 - Caldaie ad alta efficienza
 - Riscalda in breve tempo portate fino a 1800 lt/ora
 - Utilizzabile con pompa circolatore per accumulo oppure abbinata a un idropulitrice ad acqua fredda fino a 250 bar
 - Richiede un alimentazione monofase con consumi modesti (meno di 0,3 kw) per una potenzialità termica di oltre 65 kw
- Stationary hot water generator, Rack or wall mounted
 - High efficiency boiler
 - Rapid heating capability up to 1800 litres per hour
 - Ideally design to be used with in combination with a pressure washer up to 250 bar or a circulating pump with accumulator
 - Powered by 230 volt single phase (0,3 Kw) with a thermal power diesel generated up to 65 KW

ACCESSORI IN DOTAZIONE/
SUPPLIED ACCESSORIES

ADATTATORE SCARICO FUMI
EXHAUST PIPE ADAPTER



Cod. 01AC560

MOD.	DELTA T THERMAL		
		T30	T40
LT/MIN	13	60	76
	15	53	67
	18	45	56
	21	39	49
	30	x	38




ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

SERPENTINA IN ACCIAIO INOX* STAINLESS STEEL HEATING COIL * MAX 250 bar	TUBO SCARICO FUMI STAINLESS STEEL EXHAUST PIPE Ø 200 mm	TERMINALE PER CAMINO IN INOX STAINLESS STEEL CHIMNEY POT	SUPPORTO INOX E SERBATOIO STAINLESS STEEL RACK AND TANK	
				
Mod. T30 Cod. 01AC495	Cod. 02AC287 l= 1 m ø200mm	Cod. 02AC284 ø 200 mm	Mod. Tutti / All Cod. 01AC510	Mod. Tutti / All Cod. 01AC566
Mod. T40 Cod. 01AC496				

SPLIT

MODULA

SERBATOIO GASOLIO
TANK FUEL

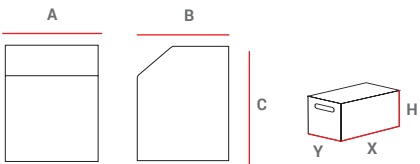

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
SPLIT 30	690	440	850	70	790	650	1.035	90
SPLIT 40	690	440	850	80	790	690	1.035	110

		T30	T40
codice - code		01SL01	01SL02
pressione max ingresso - max supply pressure	[bar] [Mpa - psi]	250 25 - 3.600	250 25 - 3.600
pressione min ingresso - min supply pressure	[bar] [Mpa - psi]	4 0,4 - 58	4 0,4 - 58
portata max - max flow rate	[lt/h]	1.260	1.800
portata min - min flow rate	[lt/h]	540	540
potenza termica - rated heat power	[Kw]	42	66
temperatura max - max temperature	[°C]	30 - 140	30 - 140
consumo gasolio - fuel consumption	[kg/h]	4,3	4,8
potenza assorbita max - max absorbed power	[Kw]	0,3	0,3
alimentazione - supply voltage	[V - ph - Hp]	230-1-50	230-1-50